

**Caution** | Please read the manual before use.  
Real color of product and catalog image color can be different.  
Contents in this catalog can be changed without any notice.

**MX On**

***TOP SE SERIES***



***TOP SE SERIES***

**Product Catalog**

**MX On CORPORATION**

**HEAD OFFICE** ADDRESS: 11-35, Simin-daero 327beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do 14055, Republic of Korea  
TEL: 031-465-3366  
FAX: 031-465-3355  
E-mail: sales@mxon.co.kr

V 1.1K 260601

[mxon.co.kr/eng](http://mxon.co.kr/eng)

MX On CORPORATION is an AX·DX-based smart factory solution platform company, delivering total solutions built on HMI/SCADA development and manufacturing, with extended expertise in robot control and logistics automation.

***TOP SE SERIES***

## CONTENTS

**TOPSE SERIES** 04P  
HMI Basic Series


**Global Networks** 08P  
Purchase and Technical Service

# TOPSE SERIES


HMI Basic Series

## INTERFACE

- SERIAL 2 PORTS
- ETHERNET 1 CHANNEL
- USB DEVICE
- USB HOST

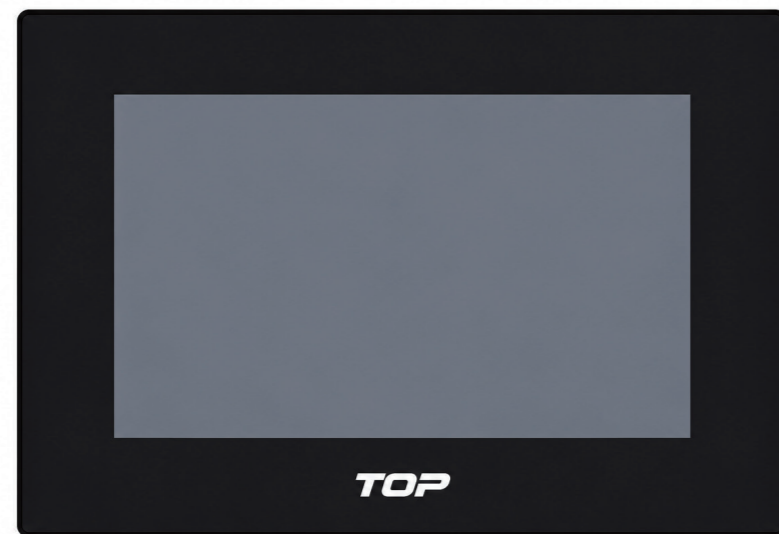

## FEATURES



### Dual Core CPU

Cost-effective dual core CPU for universal usage



### 16M Full Color

Bright full color graphics



### High Resolution

1024 x 600 high resolution in 7 inch screen



### All-in-one body with a sleek design

Premium all-in-one design for an elegant look and easy handling



### Optimized Interface Configuration


2 serial channels, 1 Ethernet port, 1 USB port

## TOPSE SPECIFICATIONS

Functional	TOPSE0700WD	
Display	Display Type	7" 16:9 TFT Color LCD
	Color	16M Colors(24 bit)
	Display Area(mm)	154.2144(H) x 85.92(V)
	Resolution(dot)	1024 x 600
	Backlight Type	LED
Touch	Backlight Life	50,000 Hours
	Touch Type	Analog resistive film
	Resolution(cell)	1024 x 600
Touch Life	Touch Life	100,000 times or more
	Serial COM1	RS-232C, RS-422/485 Asynchronous Data bit : 7/8 bits Stop bit : 1/2 bits Parity bit : None/Odd/Even Baud rate : 2400~115.2kbps Connector : DSUB 9pin
Interface	Serial COM2(2 Pin)	RS-485 Asynchronous Data bit : 7/8 bits Stop bit : 1/2 bits Parity bit : None/Odd/Even Baud rate : 2400~115.2kbps Connector : 2pin connector
	Serial COM3	RS-232C Asynchronous Data bit : 7/8 bits Stop bit : 1/2 bits Parity bit : None/Odd/Even Baud rate : 2400~115.2kbps Connector : DSUB 9pin
	Ethernet	IEEE802.3i/IEEE802.3u 10BASE-T/100BASE-TX Connector : RJ45 x 1
USB Host	USB Host	USB 2.0 Compatible Connector : USB Type A x 1
	USB Device	USB 2.0 Compatible Connector : USB Type C x 1
	Memory & Others	Memory 256MB DDR3 Storage 256MB Flash ROM Real Time Clock Built-in
Power	Input Voltage	24Vdc(9~28Vdc)
	Power Consumption	10W
Environment	Voltage Sag	24Vdc, Within 5ms
	Operation Temperature(°C)	0 ~ +50
	Storage Temperature(°C)	-20 ~ +60
	Operation Humidity(%RH)	10 ~ 90(No dew)
	Atmosphere	No corrosive gas
	Vibration Endurance	Amplitude: 10≤F < 25Hz(2G) X, Y, Z each direction(for 30 minutes)
	Electrostatic Discharge	Connective discharge from EN61000-6-2:2019 and EN61000-6-4:2019 : ±4kV RoHS : lightning surge ±1kV, group pulse ±2kV, electrostatic contact 4kV, air discharge 8kV
	Shock Endurance	10G X, Y, Z each direction(for 3 times)
	Ground Connection	Class 3(100Ω or less)
	Certification	CE
Structure	Panel Cut(mm)	190 x 136
	External Dimension(mm)	204 x 145 x 36.6
	Weight(g)	476
	Cooling System	Natural air circulation
	Case Material	Plastic

## DRAWING

TOPSE0700WD

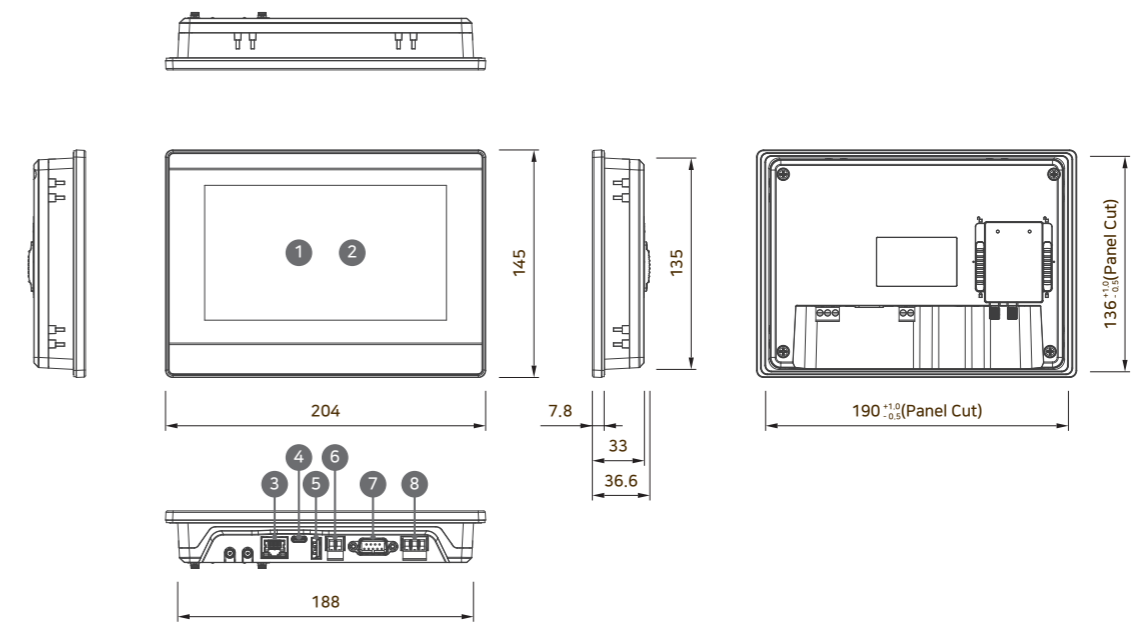


- 1 LCD Panel
- 2 Touch Panel
- 3 Ethernet
- 4 USB Device
- 5 USB Host
- 6 Serial COM2
- 7 Serial COM1/3
- 8 Power Input

# Global Networks



## Global Business Partners

China, the United States, Vietnam, Japan, South Africa, Turkiye, Singapore, Russia, Greece, France, Jordan, Honduras, Nigeria, Indonesia, India, Israel, Iran, Thailand, Malaysia, and more.

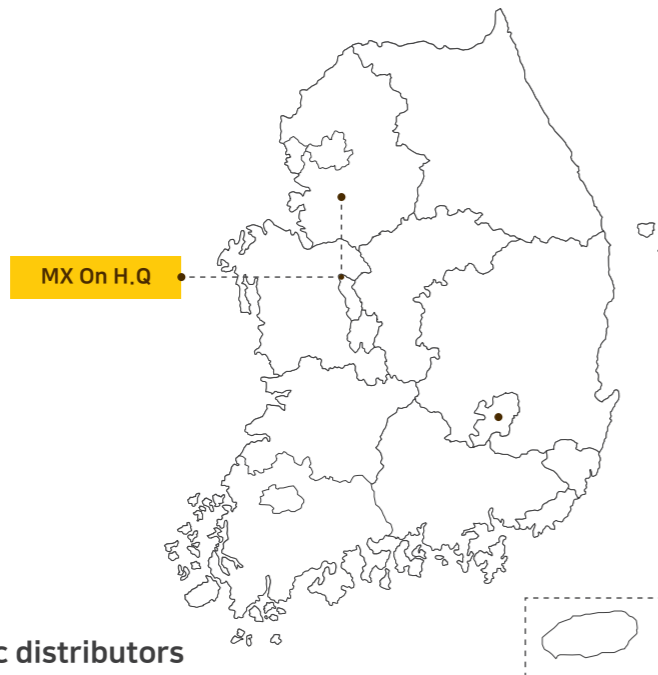

## Over 40 domestic distributors

Seoul, Gyeonggi, Daejeon, Daegu, Gwangju, Ulsan, Changwon, Busan etc.

Purchase Inquiries: [sales@mxon.co.kr](mailto:sales@mxon.co.kr)

## MX On Official YouTube Channel

Tutorials & Troubleshooting Guides



## LinkedIn

New launches. Join us on LinkdIn



## Our Promise to Customers

- Customer Dialogue** Customers first, growing together
- Continuous Growth** Driven by ongoing R&D
- New Transformation** AX·DX-based smart factory platform

Technical Support Service [sales@mxon.co.kr](mailto:sales@mxon.co.kr)